


## NGTC-24140PWR2

The NGTC-24140PWR2 is a Dante™ enabled digital bridgeable power amplifier for the nexgentec™ audio distribution solution.

The nexgentec™ DSP super modules enable efficient design and deployment of the NGTC audio network system, featuring the highest levels of functionality and performance.

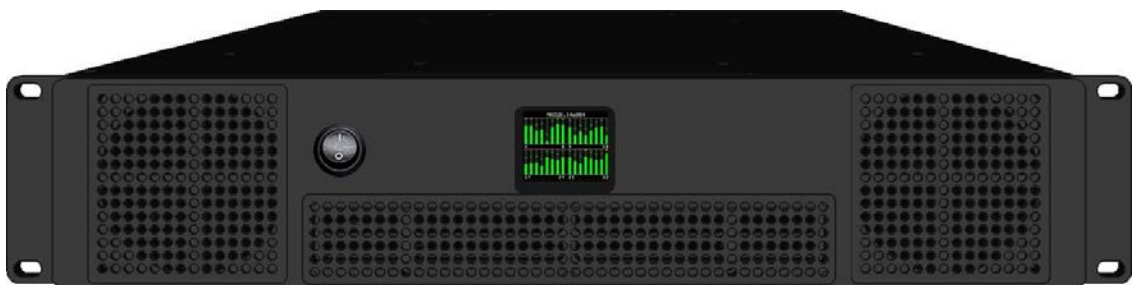

### Key Features

- 24 x 280 W - 4  $\Omega$  / Ch 1% THD
- 24 x 140 W - 8  $\Omega$  / Ch 1% THD
- 2 kW wide range power supply
- 44.1 kHz / 48 kHz
- Control interface
- Web UI for monitoring and configuration
- SNMP
- Bridgeable: 500 W - 8  $\Omega$

### Power and Dimensions

Operating Power:	90 - 264 VAC 50 / 60 Hz – 16 A
Inrush Current:	50 A max
BTU Rating Idle:	282 BTU / hr
BTU Rating 1/8 Power @ 4 $\Omega$ :	833 BTU / hr
Operation Temperature Range:	0° to 40°C
Dimensions (H x W x D):	88.9 mm (2 U) x 482.6 mm (19 inch) x 421.3 mm
Weight:	14,3 kg